


## G4-DBS-GFSS

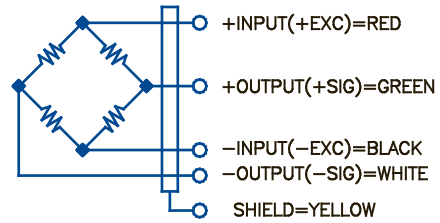

### SPECIFICATIONS

Rated Output (mV/V)	3.000
Nonlinearity (%FS)	0.03
Hysteresis (%FS)	0.02
Temperature Range: Compensated (°F)	0 to 150
Bridge Resistance (ohms)	700
Excitation Voltage (VDC)	10 Nom, 15 Max
Insulation Resistance (Mohms)	5000
Safe Overload (%FS)	150
Sealing	IP67
Material	Stainless Steel
Cable length (feet)	25

### CAPACITY

1000 lb	G4-DBS-1K-GF	\$1075
1500 lb	G4-DBS-1.5K-GF	\$1075
5000 lb	G4-DBS-5K-GF	\$1075
10,000 lb	G4-DBS-10K-GF	\$1630
15,000 lb	G4-DBS-15K-GF	\$1630
20,000 lb	G4-DBS-20K-GF	\$1630
25,000 lb	G4-DBS-25K-GF	\$1630
50,000 lb	G4-DBS-50K-GF	\$3350
75,000 lb	G4-DBS-75K-GF	\$3350
100,000 lb	G4-DBS-100K-GF	Inquiry
125,000 lb	G4-DBS-125K-GF	Inquiry

### MODEL #

### PRICE

CAPACITY	A	B	C	D	E	F	G	H	J
1K-5K	5.13	9.25	5.00	6.25	3.75	4.00	2.75	.56	.50
10K-35K	7.90	12.00	8.00	7.50	6.00	8.00	6.00	.78	.75
50K	9.30	16.25	12.00	11.50	9.50	9.00	6.50	.78	1.00

