


## G4-RB-GF

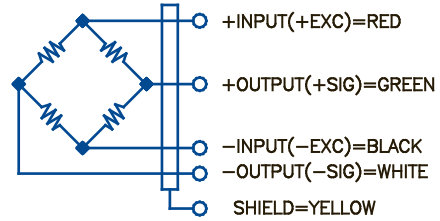

### SPECIFICATIONS

Rated Output (mV/V)	3.0±1%
Nonlinearity (%FS)	0.03
Hysteresis (%FS)	0.02
Temperature Range:	
Compensated (°F)	10 to 150
Bridge Resistance (ohms)	350
Excitation Voltage (VDC)	10 Nom, 20 Max
Insulation Resistance (Mohms)	5000
Safe Overload (%FS)	150
Sealing	IP67
Material	Nickel Plated Tool Steel
Cable length (feet)	20
Specifications for RB-N8	
Also available for RB-S	

### CAPACITY


500 to 5K lb
5K to 10K lb

### MODEL #

G4-RB-SE-GF
G4-RB-SE-GF

### PRICE

\$395
\$675

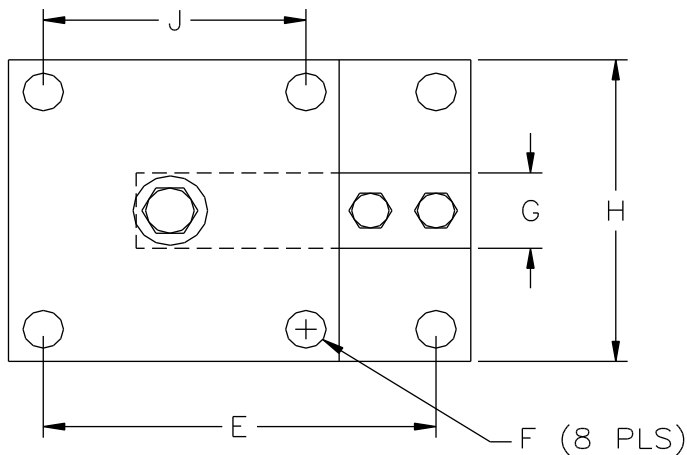

CAPACITY	500-4K	5K-10K
A	7.12	8.50
B	.25	.25
C	.75	1.0
D	5.0	5.0
E	6.0	7.0
F	.63	.63
G	1.25	1.25
H	5.0	5.0
J	4.0	4.0
BOLT A	1/2-13	3/4-10
BOLT B	1/2-20	3/4-16

