


G4-BB-A

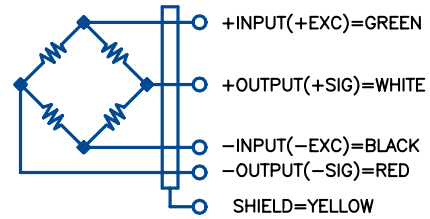

SPECIFICATIONS

Rated Output (mV/V)	3 (nominal)
Excitation (VDC)	10 Nom, 15 Max
Nonlinearity (%FS)	0.03
Hysteresis (%FS)	0.02
Bridge Resistance (Ω)	350
Temp. Range, Operating ($^{\circ}\text{C}$)	-20 to +60
Safe Overload (%FS)	150
Sealing	SIGMA Seal II & Cover/Boot
Material	Anodized Aluminum, 2024-T351
Cable length (in)	67

CAPACITY

250 lb

MODEL

G4-BB250-A

PRICE

\$395

