


G4-BB-S

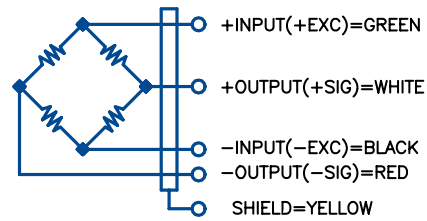

SPECIFICATIONS

Rated Output (mV/V)	3 (nominal)
Excitation (VDC)	10 Nom, 15 Max
Non-repeatability (%FS)	0.01
Bridge Resistance (Ω)	350
Combined Error (%FS)*	0.05
Zero Balance (%FS)	± 1.0
Creep 20 min. (%FS)	0.03
Temp. Range, Operating ($^{\circ}$ F)	0 to +150
Safe Overload (%FS)	150
Safe Sideload (%FS)	50
Sealing	SIGMA Seal II & Cover/Boot17-4pH
Material	Stainless Steel
Cable length (feet)	10

*Includes effects of non-linearity and hysteresis

CAPACITY

25 lb	G4-BB25-S	\$305
50 lb	G4-BB50-S	\$305
100 lb	G4-BB100-S	\$305
150 lb	G4-BB150-S	\$305
200 lb	G4-BB200-S	\$305
250 lb	G4-BB250-S	\$305

MODEL

PRICE

