


## G4-HSRB-S7



### SPECIFICATIONS

	X	CAPACITY	MODEL #	PRICE
Rated Output (mV/V)	2.997 to 3.003	500 lb	G4-HSRB-500-S7	\$425
Combined Error (%FS)*	0.03	1K lb	G4-HSRB-1K-S7	\$425
Non-repeatability (%FS)	0.01	2.5K lb	G4-HSRB-2.5K-S7	\$425
Zero Balance (%FS)	2.0	4K lb	G4-HSRB-4K-S7	\$425
Creep 20 min. (%FS)	0.03	5K lb	G4-HSRB-5K-S7	\$425
Temperature Effect:				
Output (%Ld/°F)	0.0015			
Zero (%FS/°F)	0.0025			
Temperature Range:				
Compensation (°F)	+14 to +104			
Terminal Resistance:				
Input (Ω)	350			
Output (Ω)	350±3			
Excitation Voltage	10 MaxVDC or 15VACrms			
Insulation Resistance (MΩ)	5K			
Deflection at Rated Load (inches)	0.01			
Safe Overload (%FS)	100			
Safe Sideload (%FS)	150			
Ultimate Overload (%FS)	300			
Sealing	Hermetic / IP67			
Material	Stainless Steel			
Cable Length (feet)	20			

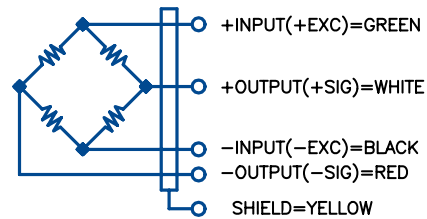

\*Includes effects of non-linearity and hysteresis

