


G4-LBB-S

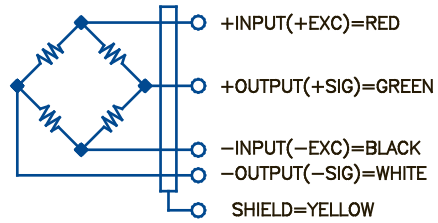

SPECIFICATIONS

Rated Output (mV/V)	3.0±10%
Rated Excitation (VDC)	10 Nom, 15 Max
Nonlinearity (%FS)	0.03
Hysteresis (%FS)	0.02
Compensated Temp. Range (°C)	-10 to 40
Bridge Resistance (Ω)	350
Insulation Resistance (MΩ)	<1000
Safe Overload (%FS)	150
Sealing	Environmentally protected
Material	Stainless steel
Cable Length (in.)	50

CAPACITY

25 lb	G4-LBB25-S	\$255
50 lb	G4-LBB50-S	\$255
100 lb	G4-LBB100-S	\$255
200 lb	G4-LBB200-S	\$255
250 lb	G4-LBB250-S	\$255
500 lb	G4-LBB500-S	\$255

MODEL

PRICE

