


G4-MBB-A

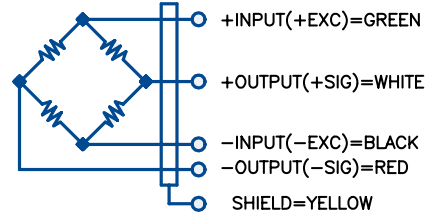

SPECIFICATIONS

Rated Output (mV/V)	2.0
Rated Excitation (VDC)	10 Nom, 15 Max
Nonlinearity (%FS)	0.03
Hysteresis (%FS)	0.02
Operating Temp Range (°C)	-20 to 60
Bridge Resistance (Ω)	350 Nom
Insulation Resistance (MΩ)	1000
Safe Overload (%FS)	150
Sealing	Environmentally Protected
Material	Aluminum
Cable Length (feet)	4.66

CAPACITY

5 kg
10 kg
15 kg
20 kg
25 kg

MODEL

G4-MBB5kg-A	\$355
G4-MBB10kg-A	\$355
G4-MBB15kg-A	\$355
G4-MBB20kg-A	\$355
G4-MBB25kg-A	\$355

PRICE

