


## G4-MBB-S

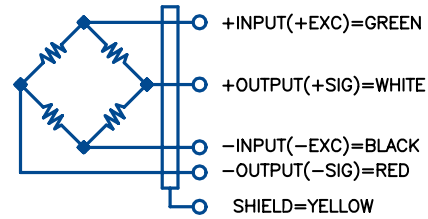

### SPECIFICATIONS

Rated Output (mV/V)	3.0±0.25%
Combined Error (%FS)	1.00
Zero Balance (%FS)	1.00
Excitation Voltage (VDC)	10 Nom, 15 Max
Output Bridge Resistance (Ω)	350±2
Deflection (in.)	0.006
Operating Temp Range (°C)	-20 to 60
Safe Overload (%FS)	150
Ultimate Overload (%FS)	300
Sealing	Environmentally protected
Material	17-4pH stainless steel
Cable Length (in.)	13

### CAPACITY

5 lb	G4-MBB-5-S	\$245
10 lb	G4-MBB-10-S	\$245
25 lb	G4-MBB-25-S	\$245
50 lb	G4-MBB-50-S	\$245
100 lb	G4-MBB-100-S	\$245
150 lb	G4-MBB-150-S	\$245
200 lb	G4-MBB-200-S	\$245
250 lb	G4-MBB-250-S	\$245

### MODEL #

### PRICE

