


G4-CH-792

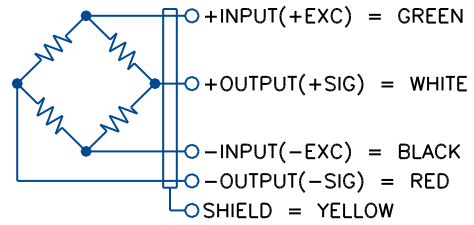

SPECIFICATIONS

| | |
|-------------------------------|--------------------|
| Rated Output (mV/V) | 2.00 |
| Nonlinearity (%FS) | <0.03 |
| Hysteresis (%FS) | <0.03 |
| Repeatability (%FS) | <0.02 |
| Zero Balance (%FS) | ±1.0 |
| Creep in 30 min (%FS) | <0.03 |
| Temperature Effect: | |
| Output (%load/°C) | <0.003 |
| Zero (%FS/°C) | <0.003 |
| Bridge Resistance (ohms) | 350 Nom |
| Excitation Voltage (VDC) | 10 Nom, 15 Max |
| Insulation Resistance (Mohms) | >5K |
| Safe Overload (%FS) | 150 |
| Sealing | IP67 Hermetic Seal |
| Cable (ft) | 50 |
| Material | Stainless Steel |

CAPACITY

50,000 lb

MODEL

G4-CH50K-792

PRICE

\$1500

