


# G4-CH-CSP1

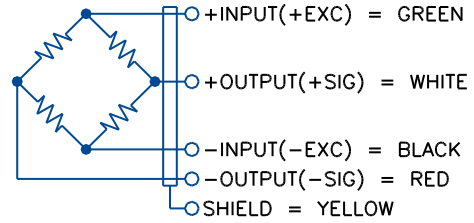

## SPECIFICATIONS

Rated Output (mV/V)	2.00
Nonlinearity (%FS)	<0.03
Hysteresis (%FS)	<0.03
Repeatability (%FS)	<0.01
Zero Balance (%FS)	±1.0
Creep in 30 min (%FS)	<0.02
Temperature Effect:	
Output (%load/°C)	<0.002
Zero (%FS/°C)	<0.002
Bridge Resistance (ohms)	350 Nom
Excitation Voltage (VDC)	10 Nom, 15 Max
Insulation Resistance (Mohms)	>5K
Safe Overload (%FS)	150
Sealing	IP67 Hermetic Seal
Cable (ft)	50
Material	Stainless Steel

CAPACITY	MODEL #	PRICE
25,000 lb	G4-CH25K-CSP1	\$1505
50,000 lb	G4-CH50K-CSP1	\$1505

