


G4-CH-63HU

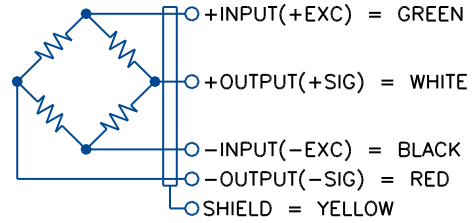

SPECIFICATIONS

Rated Output (mV/V)	3.00
Nonlinearity (%FS)	<0.03
Hysteresis (%FS)	<0.03
Repeatability (%FS)	<0.01
Zero Balance (%FS)	±1.0
Creep in 30 min (%FS)	<0.02
Temperature Effect:	
Output (%load/°C)	<0.002
Zero (%FS/°C)	<0.002
Bridge Resistance (ohms)	350 Nom
Excitation Voltage (VDC)	10 Nom, 15 Max
Insulation Resistance (Mohms)	>5K
Safe Overload (%FS)	150
Sealing	IP67 Hermetic Seal
Cable (ft)	50
Material	Stainless Steel

CAPACITY

25 lb	G4-CH25-63HU	\$1040
300 lb	G4-CH300-63HU	\$1040
500 lb	G4-CH500-63HU	\$1040
750 lb	G4-CH750-63HU	\$1050
1000 lb	G4-CH1K-63HU	\$1050
2000 lb	G4-CH2K-63HU	\$1070
3000 lb	G4-CH3K-63HU	\$1070

MODEL

PRICE

DIMENSIONS

CAPACITY (lb)	A	B	C	D	E	THREAD
200-300	3.38	2.75	0.75	2.97	1.75	3/8-24 UNF x 0.38 DP
500-1K	4.56	3.50	0.75	4.19	2.25	1/2-20 UNF x 0.50 DP
2K-3K	5.00	4.00	0.75	2.58	2.50	1/2-20 UNF x 0.50 DP

