


G4-DB65040

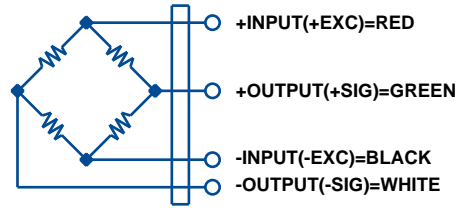

SPECIFICATIONS


Rated Output (mV/V)	3.00
Combined Error (%FS)	<0.02
Repeatability (%FS)	<0.01
Zero Balance (%FS)	±1.0
Creep in 30 min (%FS)	<0.025
Temperature Effect:	
Output (%load/°F)	<0.008
Zero (%FS/°F)	<0.0015
Bridge Resistance (ohms)	700
Excitation Voltage (VDC)	10 Nom, 15 Max
Insulation Resistance (Mohms)	>1K
Safe Overload (%FS)	150
Sealing	IP67
Cable (ft)	35
Material	Nickel Plated Alloy Steel

CAPACITY

25,000 lb	G4-DB25K65040	\$615
40,000 lb	G4-DB40K65040	\$740
50,000 lb	G4-DB50K65040	\$815
60,000 lb	G4-DB60K65040	\$815
75,000 lb	G4-DB75K65040	\$815
100,000 lb	G4-DB100K65040	\$1555
125,000 lb	G4-DB125K65040	\$1555

MODEL

PRICE

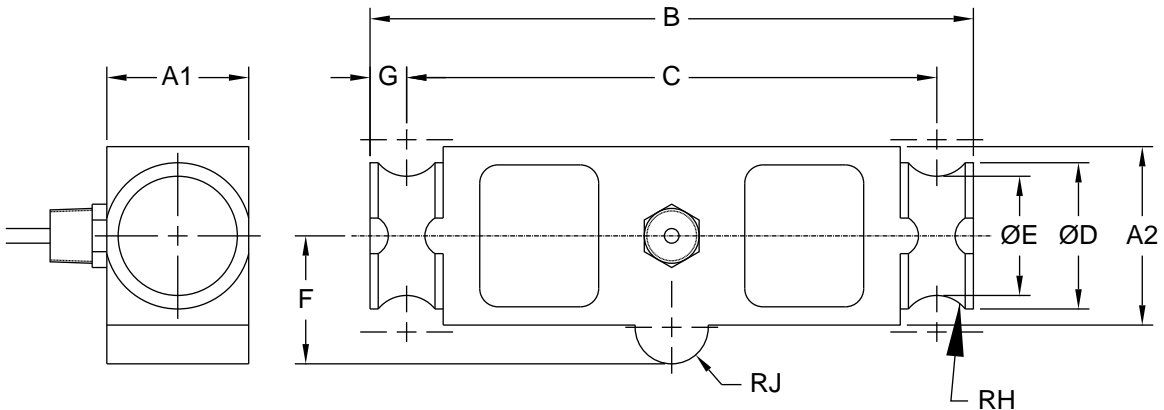

DIMENSIONS

CAPACITY (lb)	A1	A2	B	C	ØD	ØE	F	G	RH	RJ
25K-40K	1.94	2.44	8.25	7.25	2.0	1.63	1.75	0.50	0.50	0.50
50K-75K	1.94	2.94	11.50	10.00	2.2	1.70	2.00	0.75	0.75	1.00
100K-125K	2.90	3.86	14.50	12.50	3.2	2.44	2.75	1.00	1.00	1.50