


G4-DSB65058

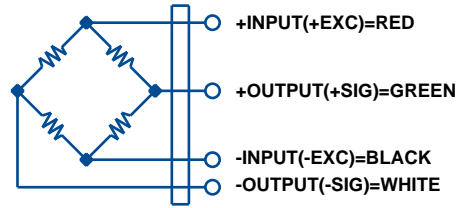

SPECIFICATIONS

Rated Output (mV/V)	3.00
Combined Error (%FS)	<0.02
Repeatability (%FS)	<0.01
Zero Balance (%FS)	±1.0
Creep in 30 min (%FS)	<0.03
Temperature Effect:	
Output (%load/°F)	<0.0008
Zero (%FS/°F)	<0.0010
Bridge Resistance (ohms)	700
Excitation Voltage (VDC)	10 Nom, 15 Max
Insulation Resistance (Mohms)	>1K
Safe Overload (%FS)	150
Sealing	IP67
Cable (ft)	35
Material	Nickel Plated Alloy Steel

CAPACITY

75,000 lb

MODEL

G4-DSB75K65058

PRICE

\$835

