


G4-DBS69803

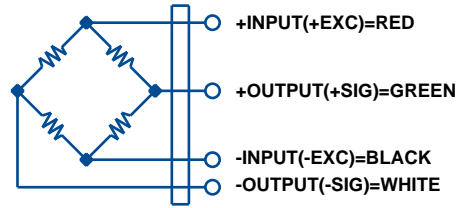

SPECIFICATIONS

Rated Output (mV/V)	3.00
Combined Error (%FS)	<0.05
Zero Balance (%FS)	±1.0
Creep in 30 min (%FS)	<0.03
Temperature Effect:	
Output (%load/°C)	<0.0008
Zero (%FS/°C)	<0.0010
Bridge Resistance (ohms)	700
Excitation Voltage (VDC)	10 Nom, 15 Max
Insulation Resistance (Mohms)	>5K
Safe Overload (%FS)	150
Sealing	IP67
Cable (m)	6
Material	Stainless Steel

CAPACITY

25,000 lb	G4-DB25KS69803	\$920
50,000 lb	G4-DB50KS69803	\$920
65,000 lb	G4-DB65KS69803	\$920

MODEL

PRICE

DIMENSIONS

CAPACITY	25-65Klb
A	10.25
B	8.50
C	1.94
D	2.94
F	4.25
G	0.88
RH	1.00
ØK	2.40
ØJ	2.06
P	2.66
RQ	1.00

