


## G4-CD-S

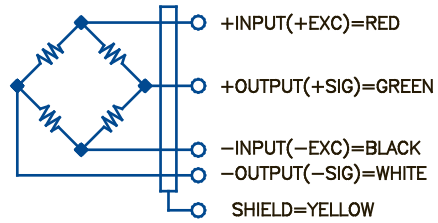

### SPECIFICATIONS

Rated Output (mV/V)	2.000±0.002
Combined Error (%FS)	0.05
Insulation Resistance (MΩ)	1000
Temperature Effect:	
Zero (%RO/°F)	.0015
Span (%FS/°F)	.001
Temperature Range:	
Operating (°C)	-20 to 60
Compensated (°C)	-10 to 40
Bridge Resistance:	
Input (Ω)	425±50
Output (Ω)	350±5
Zero Balance (%FS)	±1
Excitation Voltage (VDC)	10 Nom, 15 Max
Safe Overload (%FS)	150
Ultimate Overload (%FS)	1000
Sealing	Environmentally sealed / IP67
Material	17-4pH stainless steel
Cable Length (feet)	11

### CAPACITY

75 kg	G4-CD75-S	\$650
150 kg	G4-CD150-S	\$650
200 kg	G4-CD200-S	\$650
300 kg	G4-CD300-S	\$650
500 kg	G4-CD500-S	\$650
750 kg	G4-CD750-S	\$650
1000 kg	G4-CD1K-S	\$650
2000 kg	G4-CD2K-S	\$650

### MODEL #

### PRICE

