


## G4-CMM1-S

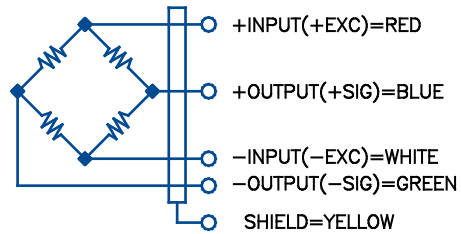

### SPECIFICATIONS

Rated Output (mV/V)	2.000±0.005
Non-linearity (%FS)	0.15
Hysteresis (&FS)	0.1
Repeatability (%FS)	0.05
Safe Overload (%FS)	150
Excitation (VAC)	12 or less
Zero Balance (mV/V)	0.06
Terminal Resistance:	
Input (Ω)	425±50
Output (Ω)	350±5
Temperature Range:	
Compensated (°C)	-10 to 70
Safe (°C)	-10 to 70
Temperature Effect:	
Zero Balance (%FS/°C)	0.005
Output (%load/°C)	0.01
Material	Stainless steel

### CAPACITY

50 kg
100 kg
200 kg
500 kg
1 ton
2 ton

### MODEL #

G4-CMM1-50kg-S
G4-CMM1-100kg-S
G4-CMM1-200kg-S
G4-CMM1-500kg-S
G4-CMM1-1t-S
G4-CMM1-2t-S

### PRICE

Consult
Factory
for
Pricing

