


## G4-MD2-S

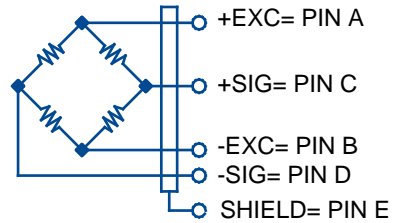

### SPECIFICATIONS

OUTPUT(mV/V)	2.0
COMBINED ERROR(%FS)	0.75
NON-REPEATABILITY(%FS)	<0.10
ZERO BALANCE(%FS)	±1%
TEMPERATURE COMPENSATION (%FS)	<2.0
TEMPERATURE RANGE(°F)	0 TO 450
BRIDGE RESISTANCE (ohms)	350
EXCITATION VOLTAGE (VDC)	12 MAX
ULTIMATE OVERLOAD (%FS)	150
CABLE(in)	12, 24, 36
MATERIAL	STAINLESS STEEL

### CAPACITY

500 lb
2000 lb

### MODEL #

G4-MD2-500-S
G4-MD2-2K-S

