


# G4-MD1-H-S

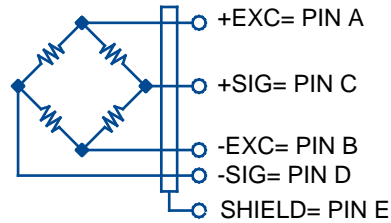

### SPECIFICATIONS


OUTPUT(mV/V)	2.0
COMBINED ERROR(%FS)	1.00
NON-REPEATABILITY(%FS)	<0.10
ZERO BALANCE(%FS)	±1%
TEMPERATURE EFFECT:	
OUTPUT(%load/°F)	0.02
ZERO (%FS/°F)	0.02
MAX TEMPERATURE RANGE(°F)	425
BRIDGE RESISTANCE:	
INPUT (ohms)	450±100
OUTPUT (ohms)	350±5
ULTIMATE OVERLOAD (%FS)	150
CABLE	SEE TABLE
MATERIAL	STAINLESS STEEL

### CAPACITY

125 lb
500 lb
2000 lb
4000 lb

### MODEL #

G4-MD1-125-H-S
G4-MD1-500-H-S
G4-MD1-2K-H-S
G4-MD1-4K-H-S

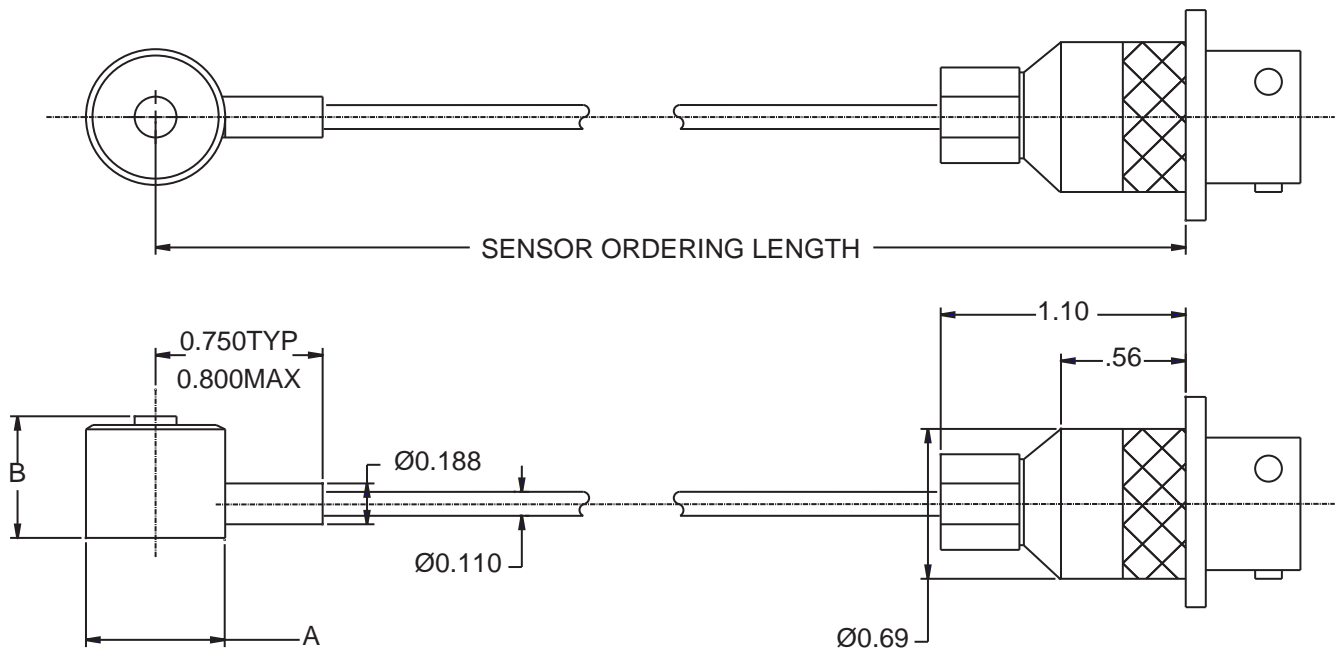

**BUTTON STYLE SENSOR DIMENSIONS**

CAPACITY	A	B	LENGTH
125 TO 2000lb	0.500 <sup>+0.000</sup> / <sub>-0.003</sub>	0.375 <sup>+0.000</sup> / <sub>-0.003</sub>	12", 24", 36", 48"
4000lb	0.625 <sup>+0.000</sup> / <sub>-0.003</sub>	0.500 <sup>+0.000</sup> / <sub>-0.003</sub>	