


G4-RP-S7C16

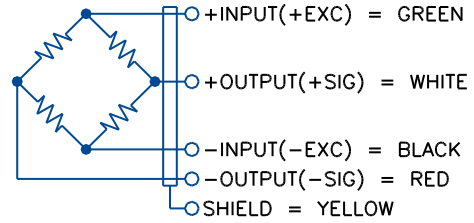

SPECIFICATIONS

Rated Output (mV/V)	2.00
Nonlinearity (%FS)	<0.02
Hysteresis (%FS)	<0.02
Repeatability (%FS)	<0.01
Zero Balance (%FS)	±1.0
Creep in 30 min (%FS)	<0.02
Temperature Effect:	
Output (%load/°C)	<0.002
Zero (%FS/°C)	<0.002
Bridge Resistance (ohms)	700
Excitation Voltage (VDC)	10 Nom, 15 Max
Insulation Resistance (Mohms)	>5K
Safe Overload (%FS)	150
Sealing	IP67
Cable (ft)	50
Material	Stainless Steel

CAPACITY

30,000 lb

MODEL

G4-RP30K-S7C16

PRICE

\$765

