


G4-C2L1-L

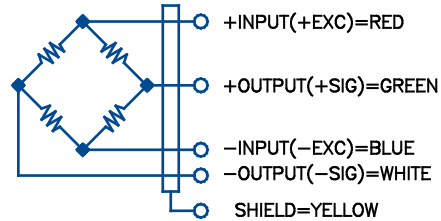

SPECIFICATIONS

Rated Output (mV/V)	2.000±0.002
Combined Error (%FS)	0.03
Creep 20 min (%load)	0.025
Non-repeatability (%FS)	0.01
Zero Balance (%FS)	2.0
Compensated Temp. Range (°C)	-10 to 40
Terminal Resistance:	
Input (Ω)	420±40
Output (Ω)	350±3
Excitation Voltage (VDC)	10 Nom, 15 Max
Safe Overload (%FS)	200
Ultimate Overload (%FS)	300
Sealing	Environmentally sealed/ IP67
Material	Aluminum; clear anodized
Cable Length (feet)	20

CAPACITY

100 kg	G4-C2L1-100k	\$350
200 kg	G4-C2L1-200k	\$350
300 kg	G4-C2L1-300k	\$350
500 kg	G4-C2L1-500k	\$350
635 kg	G4-C2L1-635k	\$350
1000 kg	G4-C2L1-1000k	\$350

MODEL

PRICE

*Includes effects of non-linearity and hysteresis

