


G4-CB004-A

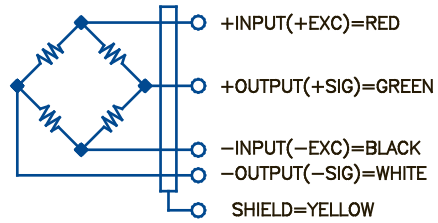

SPECIFICATIONS

Rated Output (mV/V)	2±1%
Combined Error (%load)*	0.0125
Creep 30 min. (%load)	0.008
Zero Return 30 min. (%load)	0.008 after creep
Zero Balance (%FS)	±5
Temperature Effect:	
Zero Balance (%FS/°C)	13ppm
Output (%load/°C)	10ppm
Temperature Range:	
Compensated (°C)	-10 to 40
Operating (°C)	-40 to 65
Terminal Resistance:	
Input (Ω)	420±10
Output (Ω)	350±5
Excitation Voltage (VDC)	12 Nom, 20 Max
Safe Overload (%FS)	150
Ultimate Overload (%FS)	200
Material	Aluminum
Cable Length (m)	4

CAPACITY

5 kg
10 kg
15 kg
20 kg
30 kg
50 kg
75 kg
100 kg

MODEL

G4-CB004-5-A
G4-CB004-10-A
G4-CB004-15-A
G4-CB004-20-A
G4-CB004-30-A
G4-CB004-50-A
G4-CB004-75-A
G4-CB004-100-A

PRICE

\$175
\$175
\$175
\$175
\$175
\$175
\$175
\$175

*Includes effects of non-linearity, hysteresis and repeatability

