


G4-CB17-A

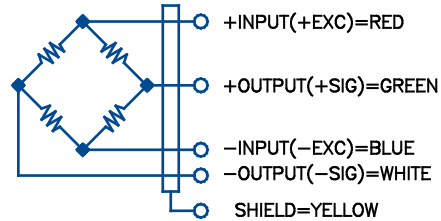

SPECIFICATIONS

Rated Output (mV/V)	1±10%
Non-linearity (%FS)	0.02
Hysteresis (%FS)	0.02
Repeatability (%FS)	0.02
Creep in 20 min. (%FS)	0.02
Creep Recovery in 20 min. (%FS)	0.02
Temperature Range:	
Compensated (°F)	14 to 122
Safe (°F)	14 to 122
Temperature Effect:	
Zero Balance (%FS/10°C)	0.022
Output (%FS/10°C)	0.007
Terminal Resistance:	
Input (Ω)	420
Output (Ω)	350±5
Insulation Resistance (MΩ)	2000@50VDC
Excitation Voltage (VDC)	10 Nom, 15 Max
Zero Balance (%FS)	±5
Material	Aluminum
Cable Length (feet)	10

CAPACITY

600 g	G4-CB17-600g
1 kg	G4-CB17-1kg
2 kg	G4-CB17-2kg
3 kg	G4-CB17-3kg

MODEL

PRICE

\$135
\$135
\$135
\$135

