


G4-TSP50 to 200lb-HPS-S1

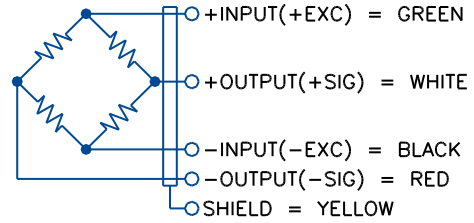

SPECIFICATIONS

Rated Output (mV/V)	3.0±0.1%
Combined Error (%FS)	0.03
Temperature Range:	
Compensated (°C)	-40 to 65
Operating (°C)	-54 to 85
Bridge Resistance (ohms)	350
Excitation Voltage (VDC)	10 Nom, 15 Max
Insulation Resistance (Mohms)	5000
Safe Overload (%FS)	200
Ultimate Overload (%FS)	300
Sealing	Hermetically Sealed
Material	17-4 PH Stainless Steel
Cable length (feet)	25

CAPACITY

50 lb
100 lb
200 lb

MODEL

G4-TSP50-HPS-S1
G4-TSP100-HPS-S1
G4-TSP200-HPS-S1

PRICE

\$615
\$615
\$615

