

## G4-NLC-A



### SPECIFICATIONS

Rated Output (mV/V)	1.7
Safe Overload (%FS)	150
Zero Balance (%FS)	±2
Excitation (VDC or VAC)	18 Max
Bridge Resistance (Ω)	1000
Nonlinearity (%FS)	0.05
Hysteresis (%FS)	0.05
Nonrepeatability (%FS)	0.01
Temperature Shift:	
Zero (%FS/°F)	0.01
Span (%load/°F)	0.01
Temperature Range:	
Compensated (°F)	60 to 160
Operating (°F)	0 to 160
Material	Aluminum
Cable Length (in)	6.5

### CAPACITY



6 kg
24 kg

### MODEL #


G4-NLC6KG-A
G4-NLC24KG-A

### PRICE

\$550
\$600

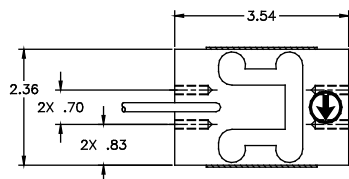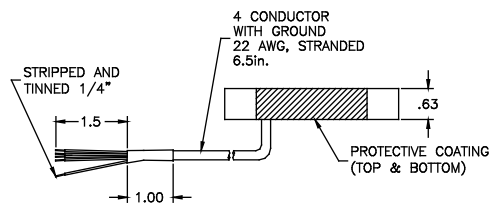

6 kg dimensions



24 kg dimensions

