


G4-TBSP-S

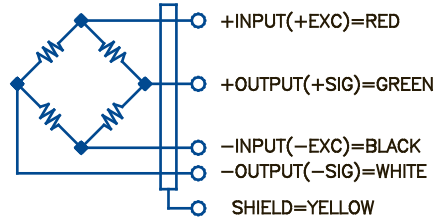


SPECIFICATIONS

Output (mV/V)	2.00 to 2.20
Zero Balance (%FS)	±2.0
Creep (%FS)	0.03
Non-repeatability (%FS)	0.03
Non-linearity (%FS)	0.03
Hysteresis (%FS)	0.05
Insulation Resistance (MΩ at 50VDC)	3K
Input Resistance (Ω)	450±100
Output Resistance (Ω)	350±5
Recommended Excitation (VDC)	10
Sealing	Environmentally sealed
Material	17-4pH stainless steel
Cable Length (feet)	11


CAPACITY

CAPACITY	MODEL #	PRICE
50 lb	G4-TBSP-50	\$1050
100 lb	G4-TBSP-100	\$1050
250 lb	G4-TBSP-250	\$1050
500 lb	G4-TBSP-500	\$1050
750 lb	G4-TBSP-750	\$1050
1000 lb	G4-TBSP-1K	\$1050

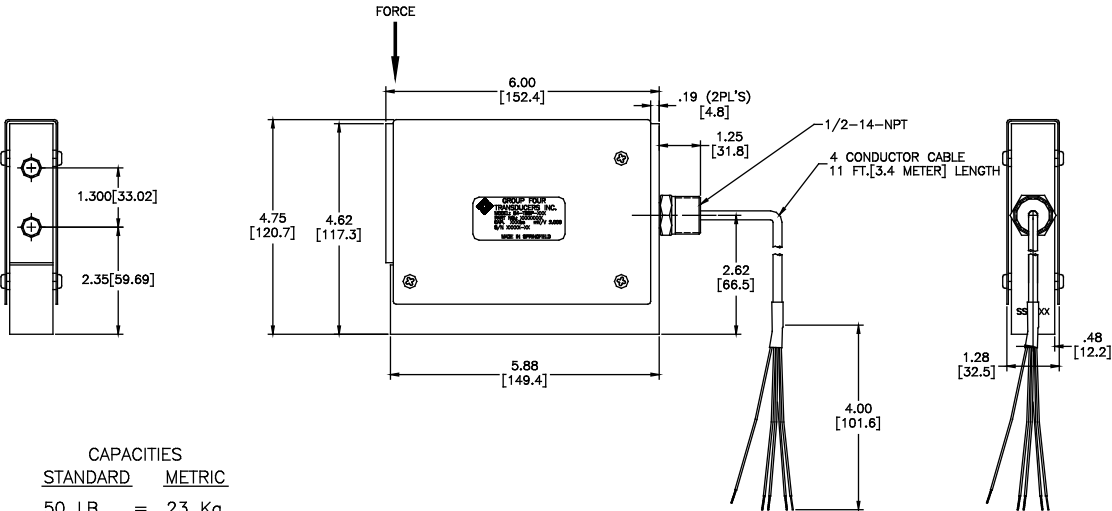

CAPACITIES	
STANDARD	METRIC
50 LB	= 23 Kg
100 LB	= 45 Kg
250 LB	= 110 Kg
500 LB	= 230 Kg
750 LB	= 340 Kg
1000 LB	= 454 Kg

DIMENSIONS	
INCHES	MM
X.XX	[XX.X]



M12 x 1.75 (4PL'S)
16mm MAXIMUM BOLT DEPTH
TORQUE: 165 N•m
CLASS 12.9 BOLTS