


G4-TSP-FLS

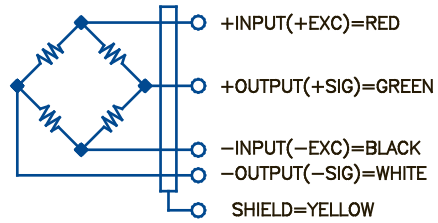

SPECIFICATIONS

Rated Output (mV/V)	1.000±0.002
Excitation Voltage (VDC)	10 Nom, 15 Max
Zero Balance (%FS)	2.0
Creep (%FS)	0.03
Non-repeatability (%FS)	0.03
Non-linearity (%FS)	0.03
Hysteresis (%FS)	0.05
Operating Temp Range (°C)	-20 to 60
Terminal Resistance:	
Input (Ω)	450±100
Output (Ω)	350±5
Insulation Resistance (MΩ)	3K
Sealing	Environmentally sealed / IP67
Material	17-4pH stainless steel
Cable Length (feet)	10

CAPACITY

CAPACITY	MODEL #	PRICE
30 lb	G4-TSP30-S-FLS	\$498
50 lb	G4-TSP50-S-FLS	\$498
75 lb	G4-TSP75-S-FLS	\$498
125 lb	G4-TSP125-S-FLS	\$550
200 lb	G4-TSP200-S-FLS	\$550
250 lb	G4-TSP250-S-FLS	\$550
625 lb	G4-TSP625-S-FLS	\$895
1250 lb	G4-TSP1250-S-FLS	\$895

