


G4-TSP-S

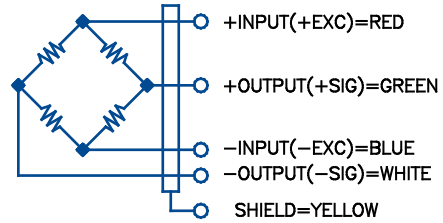

SPECIFICATIONS

Rated Output (mV/V)	2.000±0.002
Zero Balance (%FS)	±2.0
Creep (%FS)	0.03
Non-repeatability (%FS)	0.03
Non-linearity (%FS)	0.03
Hysteresis (%FS)	0.05
Temperature Range:	
Compensated (°C)	-10 to 40
Operating (°C)	-20 to 60
Insulation Resistance (MΩ)	3K
Input Resistance (Ω)	450±100
Output Resistance (Ω)	350±5
Excitation (VDC)	10 Nom, 15 Max
Sealing	Environmentally sealed
Material	17-4pH stainless steel
Cable length (feet)	10

CAPACITY

25 lb	G4-TSP25-S	\$950
50 lb	G4-TSP50-S	\$950
100 lb	G4-TSP100-S	\$950
250 lb	G4-TSP250-S	\$950
500 lb	G4-TSP500-S	\$950

MODEL

PRICE

