


G4-TSP51

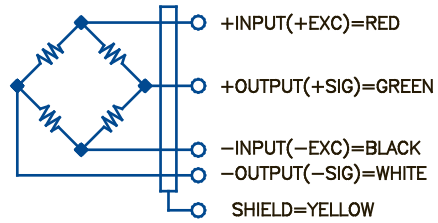

SPECIFICATIONS

Rated Output (mV/V)	2.0±.25%
Excitation Voltage (VDC)	10 Nom, 15 Max
Bridge Resistance (Ω)	350
Non-linearity (%FS)	0.03
Hysteresis (%FS)	0.02
Insulation Resistance (MΩ)	5000
Deflection at Capacity (in.)	0.10
Safe Overload (%FS)	150
Sealing	Environmentally Sealed
Material	17-4pH stainless steel
Cable Length (feet)	10

CAPACITY

15 lb	G4-TSP51-15	\$335
25 lb	G4-TSP51-25	\$335
50 lb	G4-TSP51-50	\$420
100 lb	G4-TSP51-100	\$420
200 lb	G4-TSP51-200	\$420

MODEL

PRICE

CAPACITY	"A"
15, 25lb	.47[12]
50,100 & 200lb	.73[19]

