


G4-HY-S (large envelope)

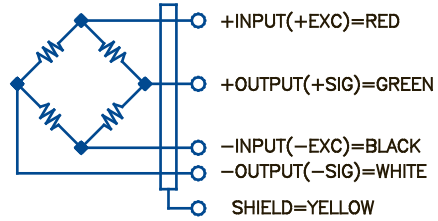

SPECIFICATIONS

Rated Output (mV/V)	3.000±0.002
Operating Temperature Range (°C)	-20 to 60
Combined Error (%FS)	<0.05
Zero Balance (%FS)	±1
Excitation Voltage (VDC)	10 Nom, 15 Max
Bridge Resistance:	
Input (Ω)	450±100
Output (Ω)	350±5
Safe Overload (%FS)	150
Sealing	Environmentally protected / IP67
Material	17-4pH stainless steel
Cable Length:	15

CAPACITY

25,000 lb
30,000 lb

MODEL

G4-HY25K-S
G4-HY30K-S

PRICE

\$2995
\$3595

