


G4-SBU-S



SPECIFICATIONS

	X	CAPACITY	MODEL #	PRICE
Rated Output (mV/V)	2.000±0.002	250 lb	G4-SBU250-S	\$595
Nonlinearity (%FS)	0.03	500 lb	G4-SBU500-S	\$595
Hysteresis (%FS)	0.02	1000 lb	G4-SBU1K-S	\$595
Nonrepeatability (%FS)	0.01	2000 lb	G4-SBU2K-S	\$595
Creep in 20 min. (%FS)	0.03	3000 lb	G4-SBU3K-S	\$595
Zero Balance (%FS)	1.0			
Compensated Temp. Range (°F)	15 to 115			
Temperature Effect:				
Output (%load/100°F)	0.08			
Zero Balance (%FS/100°F)	0.15			
Terminal Resistance (Ω)	350±1			
Excitation Voltage (VDC or VACrms)	10 Max			
Insulation Resistance (MΩ)	500 @ 50VAC			
Safe Load (%FS)	150			
Ultimate Load (%FS)	250			
Safe Side Load (%FS)	100			
Material	17-4pH Stainless Steel			
Sealing	Environmentally Sealed			
Cable Length (feet)	6			

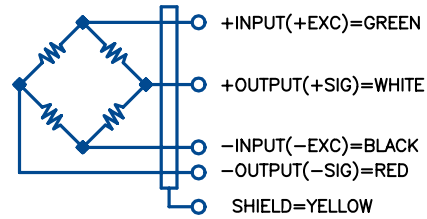