

** NOTE : Not all approvals are available on all models. Please request a certified drawing if specific approvals are required.


Mounting hardware to be ordered separately.

DIMENSIONS

RATED CAPACITY	C1	C2	C3	C4	H	H1	H2	H3	H4	L	R	SR	W	W1	W2
lb/inches															
50,000	1.48	4.33	3.74	2.44	7.87	0.83	9.41	1.25	0.56	0.53	0.27	11.02	5.51	1.40	0.53
kg/mm															
30,000	37.6	110.0	95.0	62.0	200.0	21.0	239.0	31.8	14.3	13.5	6.75	280.0	140.0	35.5	13.5

SPECIFICATIONS

Rated Capacity	t/lb	30 / 50K
Weight (G), approx.	kg/lb	7 / 15
Full Scale Output	mV/V	2±0.1%
Zero Balance	mV/V	±0.05
Non-linearity	%	<±0.030
Repeatability	%	<±0.017
Hysteresis error	%	<±0.017
Creep in 30 min.	%	<±0.020
Bridge Resistance	Ω	1000±3
Rated Excitation	V(DC/AC)	18 (25V Maximum)
Insulation Resistance	GΩ	>2[50 VDC]
Nominal Temperature Range	°C/°F	-10 to 40 / 14 to 104
Safe Overload	% of full scale	150
Breaking Overload	% of full scale	300
Seal Type		Environmentally-sealed, IP67

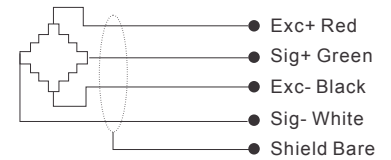

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Mettler-Toledo.....	Powercell 760/MTX*

* Powercell 760 and MTX are of digital load cells.