


** NOTE : Not all approvals are available on all models. Please request a certified drawing if specific approvals are required.

DIMENSIONS

RATED CAPACITY	H	L	L1	L2	L3	L4	L5	L6	L7	W	W1	W2	T1	T2
kg/mm														
30..150	45.0	210.0	42.0	62.0	95.0	11.5	18.5	130.0	35.0	50.0	12.5	25.0	M8	M8 Depth30
lb/inches (conversion of above dimensions)														
66..330	1.77	8.27	1.65	2.44	3.74	0.45	0.73	5.12	1.38	1.97	0.49	0.98	M8	M8 Depth1.2

SPECIFICATIONS

Rated Capacity	kg	30; 60; 150
Weight (G), approx.	kg/lb	1.2 / 2.6
Reference Max.Platform Size	mm	400x400
Full Scale Output	mV/V	1±10%
Zero Balance	mV/V	±0.06
Non-linearity	%	<±0.017
Repeatability	%	<±0.017
Hysteresis Error	%	<±0.017
Creep in 30 min.	%	<±0.023
Bridge Resistance	Ω	415±15
Rated Excitation	V(DC/AC)	12 (18V Maximum)
Insulation Resistance	GΩ	>1[50 VDC]
Nominal Temperature Range	°C/°F	-10 to 40 / 14 to 104
Safe Overload	% of full scale	150
Breaking Overload	% of full scale	300
Seal Type		Environmentally-sealed, IP66

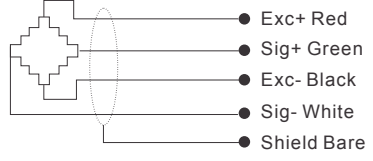

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
A&D.....	LC-4103

SINGLE POINTS