


\*\* NOTE : Not all approvals are available on all models.  
Please request a certified drawing if specific approvals are required

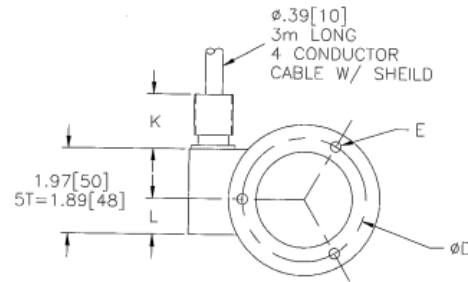


**DIMENSIONS**

RATED CAPACITY	$\phi A$	B	C	$\phi D$	E	F	G	H	$\phi I$	K	L
<b>kN/inches</b>											
49.03	3.46	1.57	Sr150	2.83	M6x1 6DP	.90	.69	1.38	.70	1.25	.83
980.7	3.46	1.77	SR150	2.83	M6x1 6DP	.90	.78	1.57	.70	1.14	.83
196.1	4.49	1.97	SR230	3.54	M8x1.25 6DP	.94	.88	1.77	.63	1.14	.75
<b>T/mm</b>											
5	88	40	SR150	72	M6x1 6DP	23	17.5	35	18	32	21
10	88	45	SR150	72	M6x1 6DP	23	20	40	18	29	21
20	114	50	SR230	90	M8x1.25 6DP	24	22.5	45	21	29	19

**SPECIFICATIONS**

Rated Capacity	T	5,10,20
Full Scale Output	mV/V	2.000±0.005
Zero Balance	mV/V	±0.02
Non-linearity	%	<±0.1
Repeatability	%	<±0.015
Hysteresis error	%	<±0.1
Rated Excitation	V(DC/AC)	12 or less
Terminal Resistance		
Input	Ohms	350±3.5
Output	Ohms	350±5
Temperature Range		
Compensated	°C	-10 to 70
Safe	°C	-10 to 70



- Exc+ Red
- Sig+ Blue
- Exc- White
- Sig- Green
- Shield Bare

**CANISTERS & DISKS**