


Stainless Steel



** NOTE : Not all approvals are available on all models. Please request a certified drawing if specific approvals are required.

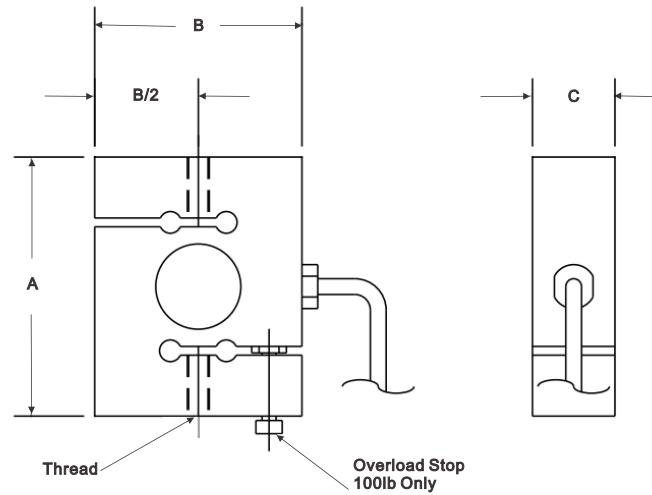

RATED CAPACITY

DIMENSIONS

	A	B	C	THREAD
lb/inches				
100	2.50	2.00	.50	1/4-28 UNF-2B
250-3000	2.95	2.36	.94	1/2-20 UNF-2B
5000	4.25	3.15	1.00	3/4-16 UNF-2B
10000	4.75	3.50	1.00	3/4-16 UNF-2B
kg/mm				
45.36	63.5	50.80	12.7	1/4-28 UNF-2B
113.40-1360.78	74.93	59.94	23.88	1/2-20 UNF-2B
2267.96	107.95	80.01	25.40	3/4-16 UNF-2B
4535.92	120.65	88.90	25.40	3/4-16 UNF-2B

SPECIFICATIONS

Rated Capacity	lb	100,250,300,500,750,1000,1500,2000,2500,3000,5000,10000
Full Scale Output	mV/V	3.000±0.1%
Zero Balance	%FS	±0.5
Combined Error	%FS	<0.020
Repeatability	%FS	<0.010
Creep in 30 min	%FS	<0.021
Temperature Range		
Input	°F	15 to 104
Output	°F	-20 to 150
Excitation Voltage	VDC	10 Nom, 15 Max
Safe Overload	%FS	150
Ultimate Overload	%FS	300
Sealing		IP67
Cable	Feet	20

Capacities : 100,250,500,1000,2500

- Exc+ Green
- Sig+ Red
- Exc- Black
- Sig- White
- Shield Bare

Capacities: 300,750,1000,1500,2000,3000,5000,10000

- Exc+ Red
- Sig+ Green
- Exc- Black
- Sig- White
- Shield Bare

S-BEAM