




** NOTE : Not all approvals are available on all models. Please request a certified drawing if specific approvals are required.

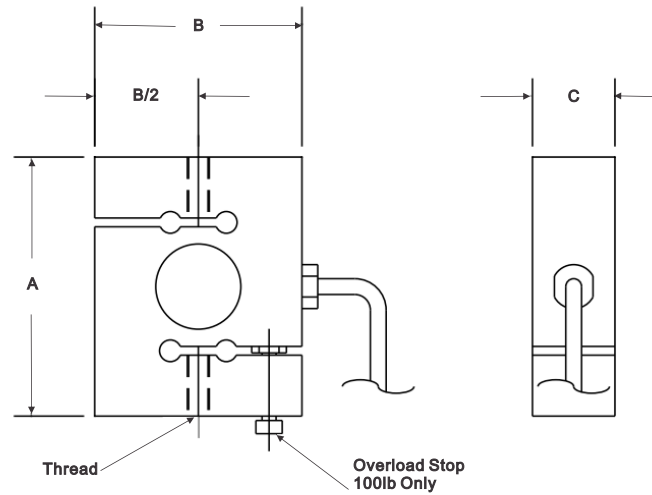

RATED CAPACITY

DIMENSIONS

| | A | B | C | THREAD |
|------------------|--------|-------|-------|---------------|
| lb/inches | | | | |
| 100 | 2.50 | 2.00 | .50 | 1/4-28 UNF-2B |
| 250-3000 | 2.95 | 2.36 | .94 | 1/2-20 UNF-2B |
| 5000 | 4.25 | 3.15 | 1.00 | 3/4-16 UNF-2B |
| 10000 | 4.75 | 3.50 | 1.00 | 3/4-16 UNF-2B |
| kg/mm | | | | |
| 45.36 | 63.5 | 50.80 | 12.7 | 1/4-28 UNF-2B |
| 113.40-1360.78 | 74.93 | 59.94 | 23.88 | 1/2-20 UNF-2B |
| 2267.96 | 107.95 | 80.01 | 25.40 | 3/4-16 UNF-2B |
| 4535.92 | 120.65 | 88.90 | 25.40 | 3/4-16 UNF-2B |

SPECIFICATIONS

| | | |
|---------------------------|------|---|
| Rated Capacity | lb | 100,250,300,500,750,1000,1500,2000,2500,3000,5000,10000 |
| Full Scale Output | mV/V | 3.000±0.1% |
| Zero Balance | %FS | ±0.5 |
| Combined Error | %FS | <0.020 |
| Repeatability | %FS | <0.010 |
| Creep in 30 min | %FS | <0.021 |
| Temperature Range | | |
| Input | °F | 15 to 104 |
| Output | °F | -20 to 150 |
| Excitation Voltage | VDC | 10 Nom, 15 Max |
| Safe Overload | %FS | 150 |
| Ultimate Overload | %FS | 300 |
| Sealing | | IP67 |
| Cable | Feet | 20 |

Capacities : 100,250,500,1000,2500

Capacities: 300,750,1000,1500,2000,3000,5000,10000

S-BEAM