


** NOTE : Not all approvals are available on all models. Please request a certified drawing if specific approvals are required.

DIMENSIONS

RATED CAPACITY	A	B	C	D	E	F	G	H	J
lb/inches									
50..200	1.23	5.00	0.75	0.37	0.38	0.62	3.50	1.50	1.25
500 & 1K	1.23	5.38	0.75	0.37	0.62	1.00	3.25	2.12	1.01
5K	1.70	7.78	1.38	0.53	0.75	1.75	4.03	3.47	2.06
kg/mm									
22.7..90.7	31.24	127.00	19.05	9.40	09.65	15.75	88.90	38.10	31.75
226.80..453.6	31.24	136.65	19.05	9.40	15.75	25.40	82.55	53.85	25.65
2267.1	43.18	197.61	35.05	13.46	19.05	44.45	102.36	88.14	52.30

SPECIFICATIONS

Rated Capacity	lb	50;100; 200;500;1000;5000
Full Scale Output	mV/V	2.0
Zero Balance	mV/V	±.10
Combined Error	%	<±0.03
Creep in 30 min.	%	<±0.06
Bridge Resistance	Ω	<±0.03
Rated Excitation	V(DC/AC)	5 (15V Maximum)
Insulation Resistance	GΩ	>5[100 VDC]
Nominal Temperature Range	°C/°F	-20 to +65/-4 to 149
Safe Overload	% of full scale	100
Breaking Overload	% of full scale	300
Seal Type		Environmentally-sealed, IP65
Cable Length	Feet	10

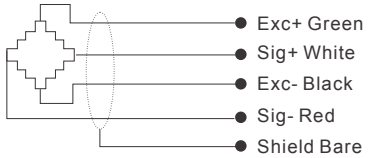

- Exc+ Green
- Sig+ White
- Exc- Black
- Sig- Red
- Shield Bare